





ANCHORAGE SLING 1.0 M

Ref. 71450

TECHNICAL SHEET

CE 0120

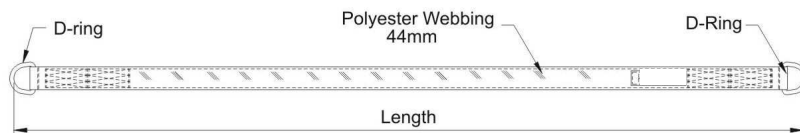

Stitching Pattern

Gencode :

3435241 714503

GENERAL DESCRIPTION AND MATERIALS

- red weaved polyester webbing
- Width : 44 mm
- Length : 1.0m
- Static strength: > 10KN
- Rope ends stitched
- 2 D-rings
- Weight : 330 g (+/-10%)
- Breaking strength minimum : 25KN

SPECIFIC ADVANTAGES

- 2 steel D-rings deburred and polished
- to be used horizontally

MAIN APPLICATION FIELDS

- Job in **high places** in combination with a **fall arrestor system** or a **work positioning system**.
- **Caution** : a lanyard without an energy absorber shall not be used within a fall arrestor system
- **Construction and civil engineering**
- Dynamic strength: **mass of 100Kg maximum**
- **Attachment** between this lanyard and any other equipment or anchorage point shall only be carried out with connectors in accordance with EN 362.

PACKAGING

- Individual packing
- Carton of 25 slings

STANDARDIZATION

This sling is in conformity with the model of individual safety equipment which correspond to **EN 795:1996**

The CE Type-examination certificate 2598 Issue 4 Extension 1

+ A1:2000

Delivered by **SATRA (notified body n° 0321)**



EUROPROTECTION – 420, rue de la Dombes – 01700 MIRIBEL – FRANCE