


## TEMPORARY ANCHORAGE SLING 1.5 M

Ref. 71455

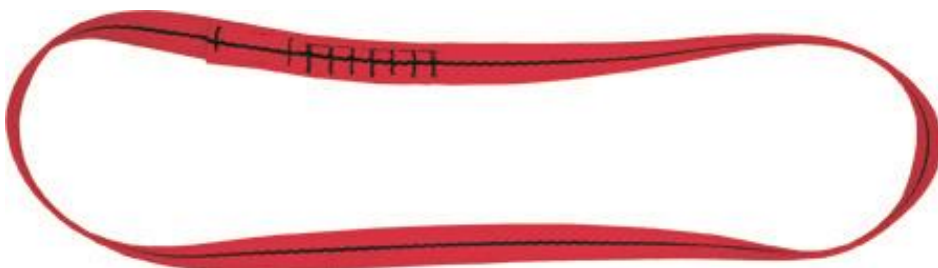

## GENERAL DESCRIPTION AND MATERIALS

- Weaved polyester
- Width : 25 mm
- Length : 1.5 m
- Static strength: > 10KN
- Weight : 300 g (+/-10%)

## SPECIFIC ADVANTAGES

- Solidity
- Lightness
- To be used horizontally

## MAIN APPLICATION FIELDS

- Job in **high places** in combination with a **fall arrestor system** or a work positioning system.
- **Caution : a lanyard without an energy absorber shall not be used within a fall arrestor system**
- **Construction and civil engineering**
- Dynamic strength: **charge of 100 Kg maximum**
- **Attachment** between this lanyard and any other equipment or anchorage point shall only be carried out **with connectors in accordance with EN 362**

## PACKAGING

- **Individual** packing
- **50 slings in a box**

## STANDARDIZATION

This sling is in conformity with the model of individual safety equipment which correspond to

**The C-E examination type certificate 4532 Issue 5 Ext 6**

Delivered by SATRA (**notifying body n° 0321**)

**EN 795:2012**

**Class B**

