


ATEX FLASHLIGHT
COVERGUARD

coverguard®
XPERT
for a nice day



RoHS

REACH

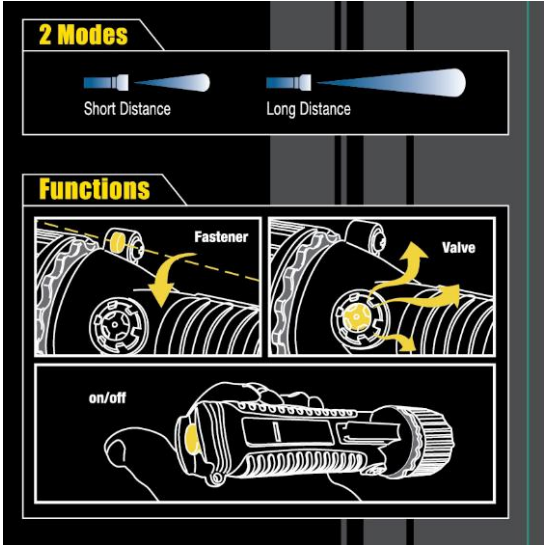

Yellow / Black






Reference
71900

General Description

	Low	High
Battery Size	4 x AA (LR6)	
Light Source	Cree XP-E LED	
Mode	Low / High	
Light Output	31 lm	120 lm
Beam Distance	85 m	172 m
Run Time	69 hrs 10 mins	6 hrs
IP Rating	IP6X	
Weight	115 g	
Dimension	174 x 47 x 47mm	

Packaging & Storing

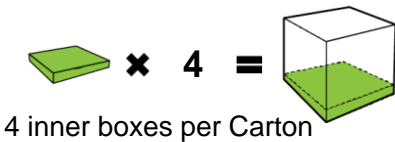

48 pieces in 1 carton

Always transport and store in the original packaging. Store in a dry place, away from direct sunbeam.

Specific Advantages

Water Resistant	Drop Resistant
Non-slip handle	High-visibility yellow color body
High Power LED	Usable in explosive atmosphere

Product Standards

This article has been certified according to the applicable norms mentioned in :

The EC Type-examination certificate n° DEMKO 13 ATEX 1302999X (Rev. 0)
Delivered by UL (notified body n° 0539)
The IECEx certificate n° IECEx UL 13.0013X (Issue 0)
Delivered by UL LLC



II 1 G Ex ia IIC T4



0539



Ex ia IIC T4 Ga



Class I Div 1 & 2 Grp ABCD
Class II Div 1 & 2 Grp EFG
Class III Temp Code: T4